



SPECIFICATIONS


DIAMETER: 6.5" (170MM)
SENSITIVITY: 89.3 dB
POWER HANDLING: 30 WRMS (100W PK)
FREQUENCY RESPONSE: 70 ~ 5000 HZ
NOMINAL IMPEDANCE: 4 OHMS
VOICE COIL DIAMETER: 1.0" (26MM)
DIMENSIONS:

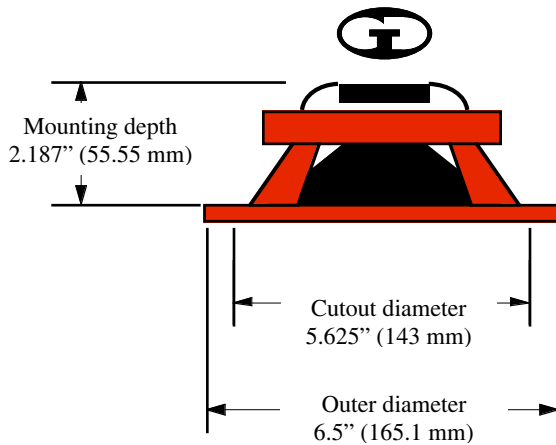

**REAR VOLUME = 3.0CU. FT.
(85 LITERS)**

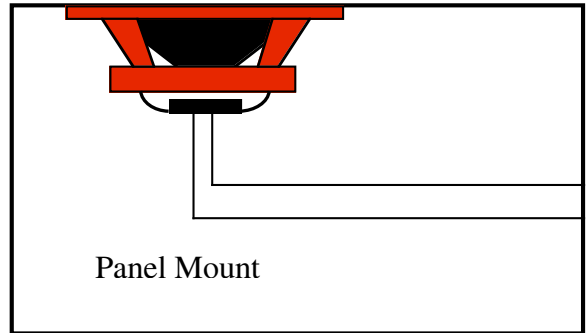

**DOOR MOUNT
FREQUENCY RESPONSE @ 10 WATTS**

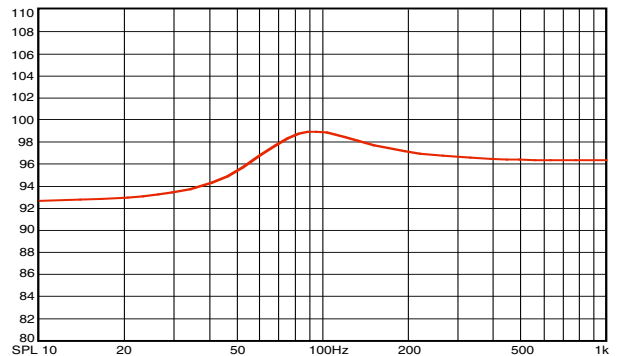

THIELE-SMALL PARAMTERS

FREE AIR RESONANCE: 77.7 HZ
VOICE COIL DC RESISTANCE: 4.17 OHMS
VOICE COIL INDUCTANCE @ 1 kHz: 0.28 MH
MECHANICAL Q (Q_{MS}): 7.32
ELECTRICAL Q (Q_{ES}): 1.24
TOTAL Q (Q_{TS}): 1.06
COMPLIANCE VOLUME (V_{AS}): 7.36 L
MOVING MASS, DIAPHRAGM: 14.11 GR
DRIVER RADIATING AREA (S_D): 132.7 CM²
 20.56 IN²
MOTOR FORCE FACTOR: 4.81 TM

NOTE:
FREE AIR USE ONLY - MOUNT IN REAR DECK, LARGE DOOR OR PANEL.